





效果图

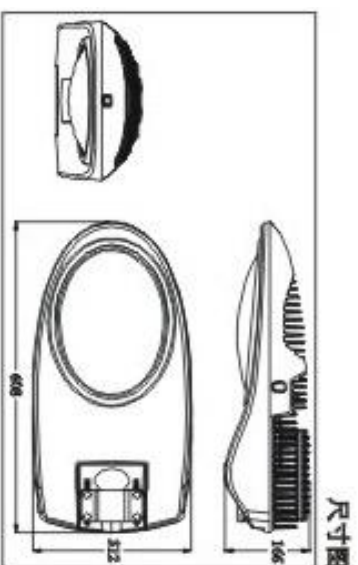

尺寸图

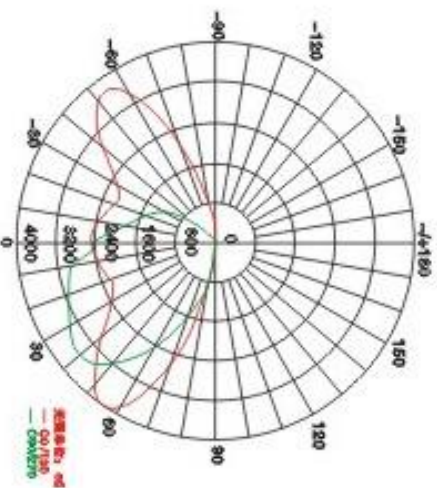

灯具参数

订货代码	B-14
型号	ZLED-LLD60-AC/220-G-S-III-C-B02
输入电压	AC 170V ~ 265V
频率范围	50/60HZ
功率因数(PF)	≥0.92
电源效率	≥90%
LED功耗	60W
灯具功耗	67W
LED发光效率	≥100lm/w
灯具光通量	≥6000LM
灯具效率 (%)	≥90%
照度均匀度	≥0.6
显色指数 (CRI)	Ra > 80
结温 (Tj)	< 80°C
防护等级	IP65
工作环境	温度: -40°C ~ 50°C; 湿度: 10% ~ 90%RH
仓储温度	10°C ~ 60°C
使用寿命	>50000Hrs
材料	铝合金
包装尺寸 (单位: cm)	79 (L) × 38(W) × 24(H)
净重	11.7Kg
安装管径	φ 48mm, φ 60mm

应用领域

乡村路, 小区路, 庭院路, 公园路, 工业区路, 加油站, 停车场等。
色温
暖白: 2700K ~ 4000K ; 正白: 4000K ~ 6500K

