



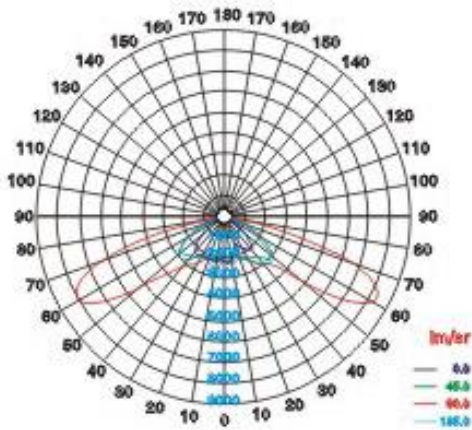

效果图

尺寸图

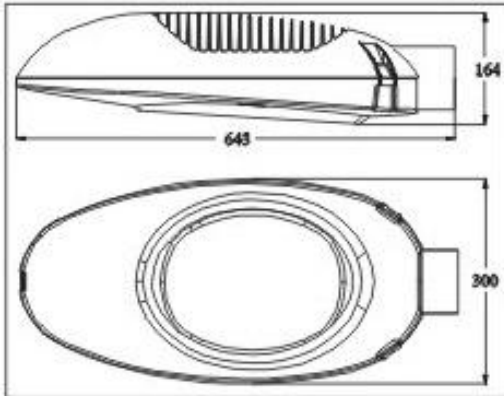

▶ 灯具参数

订货代码	T-A-21
型号	ZLED-LLD60-DC/24-G-J-II-C-A02
输入电压	DC 24V
电源效率	≥90%
LED功耗	60W
灯具功耗	67W
LED发光效率	≥100lm/w
灯具光通量	≥6000LM
灯具效率(%)	≥90%
照度均匀度	≥0.6
显色指数 (CRI)	Ra > 80
结温 (Tj)	< 80°C
防护等级	IP65
工作环境	温度: -40°C ~ 50°C; 湿度: 10% ~ 90%RH
仓储温度	10°C ~ 60°C
使用寿命	> 50000Hrs
材料	铝合金
包装尺寸(单位:cm)	64 (L) × 31(W) × 18(H)
净重	3.3Kg
安装管径	∅ 48mm, ∅ 60mm

应用领域

乡村路, 小区路, 庭院路, 公园路, 工业区路, 加油站, 停车场等。

色温

暖白: 2700K ~ 4000K; 正白: 4000K ~ 6500K

