





效果图

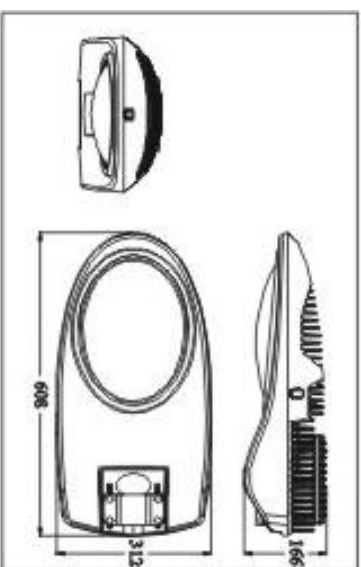

尺寸图

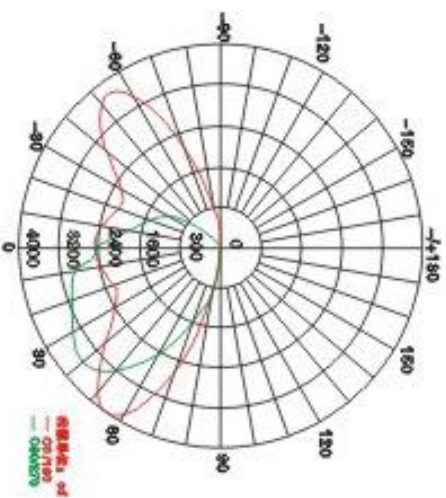

灯具参数

| | |
|-------------|--------------------------------------|
| 订货代码 | T-B-25 |
| 型号 | ZLED-LLD72-DC/24-G-S-■-C-B02 |
| 输入电压 | DC 24V |
| 电源效率 | ≥90% |
| LED功耗 | 72W |
| 灯具功耗 | 80W |
| LED发光效率 | ≥100lm/w |
| 灯具光通量 | ≥7200LM |
| 灯具效率(%) | ≥90% |
| 照度均匀度 | ≥0.6 |
| 显色指数 (CRI) | Ra > 80 |
| 结温 (Tj) | < 80°C |
| 防护等级 | IP65 |
| 工作环境 | 温度: -40°C ~ 50°C; 湿度: 10% ~ 90%RH |
| 仓储温度 | 10°C ~ 60°C |
| 使用寿命 | > 50000Hrs |
| 材料 | 铝合金 |
| 包装尺寸(单位:cm) | 79 (L) × 38(W) × 24(H) |
| 净重 | 11.7Kg |
| 安装管径 | φ48mm, φ60mm |

应用领域

乡村路, 小区路, 庭院路, 公园路, 工业区路, 加油站, 停车场等。
色温
暖白: 2700K~4000K ; 正白: 4000K~6500K

