



效果图

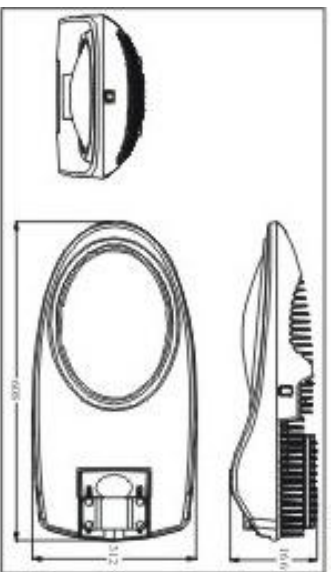

尺寸图

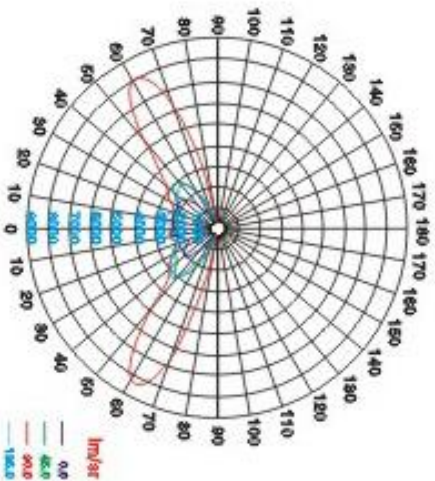

灯具参数

订货代码	B-3
型号	ZLED-LLD80-AC/220-G-J-III-C-B02
输入电压	AC 170V~265V
频率范围	50/60HZ
功率因数(PF)	≥0.92
电源效率	≥90%
LED功耗	80W
灯具功耗	90W
LED发光效率	≥100lm/w
灯具光通量	≥8000LM
灯具效率(%)	≥90%
照度均匀度	≥0.6
显色指数(CRI)	Ra>80
结温(Tj)	< 80℃
防护等级	IP65
工作环境	温度:-40℃~50℃; 湿度:10%~90%RH
仓储温度	10℃~60℃
使用寿命	>50000Hrs
材料	铝合金
包装尺寸(单位:cm)	79(L)×38(W)×24(H)
净重	11.7Kg
安装管径	φ48mm, φ60mm

应用领域
次干道，支路，城乡街道，小区路，公园路，工业区路，加油站，停车场等。

色温
暖白：2700K~4000K； 正白：4000K~6500K



IP65



IK08

