


灯具参数

订货代码	T-B-20
型号	ZLED-LLD48-DC/24-G-J-II-C-B02
输入电压	DC 24V
电源效率	≥90%
LED功耗	48W
灯具功耗	54W
LED发光效率	≥100lm/w
灯具光通量	≥4800LM
灯具效率(%)	≥90%
照度均匀度	≥0.6
显色指数 (CRI)	Ra>80
结温 (Tj)	<80°C
防护等级	IP65
工作环境	温度: -40°C ~ 50°C; 湿度: 10% ~ 90%RH
仓储温度	10°C ~ 60°C
使用寿命	>50000Hrs
材料	铝合金
包装尺寸(单位:cm)	79 (L) × 38(W) × 24(H)
净重	11.7Kg
安装管径	φ48mm, φ60mm

应用领域
乡村路, 小区路, 庭院路, 公园路, 工业区路, 加油站, 停车场等。
色温
暖白: 2700K~4000K; 正白: 4000K~6500K



效果图

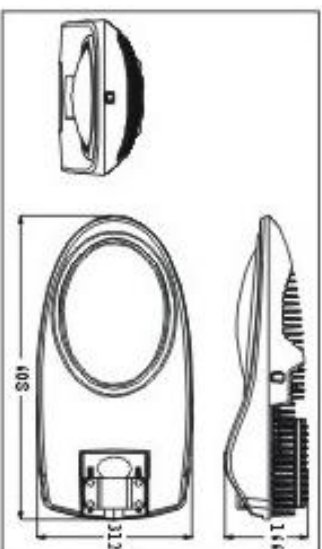

尺寸图

