





效果图

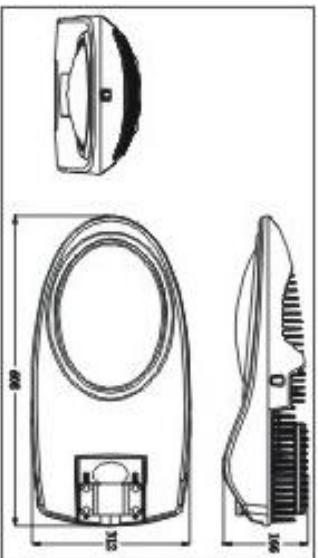

尺寸图

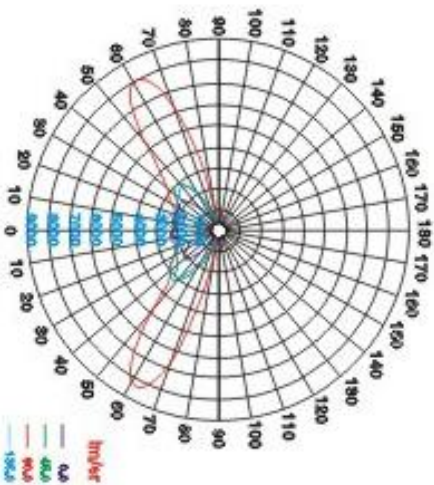

灯具参数

订货代码	B-12
型号	ZLED-LLD80-AC/220-G-J-III-C-B02
输入电压	AC 170V~265V
频率范围	50/60HZ
功率因数(PF)	≥0.92
电源效率	≥90%
LED功耗	60W
灯具功耗	67W
LED发光效率	≥100lm/w
灯具光通量	≥6000LM
灯具效率(%)	≥90%
照度均匀度	≥0.6
结温(T)	<80°C
显色指数(CRI)	Ra>80
防护等级	IP65
工作环境	温度:-20°C~40°C; 湿度:10%~90%RH
仓储温度	10°C~60°C
使用寿命	>50000Hrs
材料	铝合金
包装尺寸(单位:cm)	79(L)×38(W)×24(H)
净重	11.7Kg
安装管径	φ48mm, φ60mm

应用领域
乡村路，小区路，庭院路，公园路，工业区路，加油站，停车场等。
色温
暖白：2700K~4000K； 正白：4000K~6500K

