





效果图

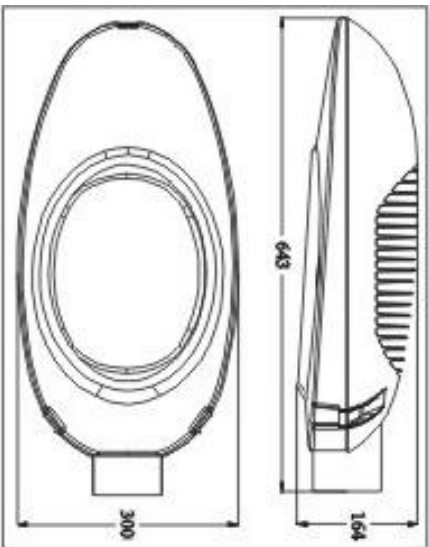

尺寸图

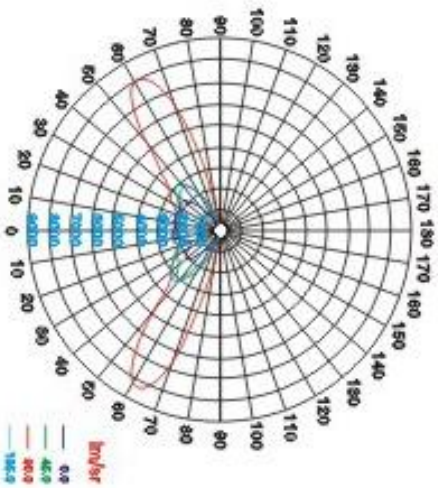

灯具参数

订货代码	A-16
型号	ZLED-LLD60-AC/220-G-J-III-C-A02
输入电压	AC 170V~265V
频率范围	50/60HZ
功率因数(PF)	≥0.92
电源效率	≥90%
LED功耗	60W
灯具功耗	67W
LED发光效率	≥100lm/w
灯具光通量	≥6000LM
灯具效率(%)	≥90%
照度均匀度	≥0.6
结温(Tj)	< 80℃
显色指数(CRI)	Ra>80
防护等级	IP65
工作环境	温度:-40℃~50℃; 湿度:10%~90%RH
仓储温度	10℃~60℃
使用寿命	>25000Hrs
材料	铝合金
包装尺寸(单位:cm)	64(L)×31(W)×18(H)
净重	8.3Kg
安装管径	φ48mm, φ60mm

应用领域
乡村路, 小区路, 庭院路, 公园路, 工业区路, 加油站, 停车场等。

色温
暖白: 2700K~4000K; 正白: 4000K~6500K

